

SPECIFICATIONS

EXITS

HOUSING

- Die-cast aluminum housing
- Available in white, black, or aluminum finishes
- Field selectable knockout chevron directional indicators
- Unit can be ordered as single (1), double (2), or single/double (3) face applications

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs

BATTERY

- 4.8V Maintenance-free, rechargeable NiCad battery (EM models)
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

MOUNTING

- Aluminum mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- Assembled in America (under the Buy American Act) available

WARRANTY

- 5 Year




CA
Cast Aluminum Exit

ORDERING INFORMATION

MODEL#	# Faces	Letter	Housing	Face
CA	1	R (Red)	A (Aluminum)	A (Aluminum)
	2	G (Green)	W (White)	W (White)
	3	B (Black)	B (Black)	B (Black)

OPTIONS (Factory Installed)

EM	- NiCad Battery
SD	- Self Diagnostics
TPS	- Tamper Proof Screws
2AC120	- Dual Circuit with 120V Input (AC only)
2AC277	- Dual Circuit with 277V Input (AC only)
USA	- Assembled in USA

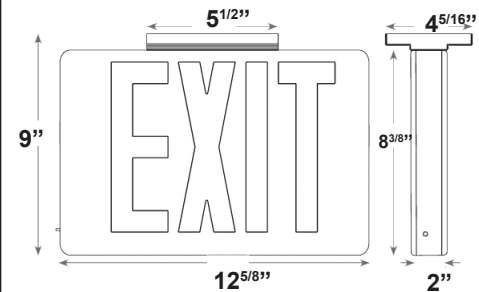

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
CAR CAR-EM CAR-2C CAR-SD	3.2	3.6	0.031	0.019
CAG CAG-EM CAG-2C CAG-SD	3.8	4.4	0.033	0.017