

SPECIFICATIONS

EXITS

HOUSING

- Die-cast aluminum housing
- Available in white, black, or aluminum finishes
- Field selectable knockout chevron directional indicators
- Unit can be ordered as single (1), double (2), or single/double (3) face applications

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs
- 3W LED Lamps (86 Lumens/lamp)

BATTERY

- 8.4V Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board and lamp heads for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Remote Capability optional (up to 3W)

MOUNTING

- Aluminum mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified

WARRANTY

- 5 Year




CAC
Die-Cast
Aluminum Combo

ORDERING INFORMATION

MODEL#	# Faces	Letter	Housing	Face
CAC	1	R (Red)	A (Aluminum)	A (Aluminum)
	2	G (Green)	W (White)	W (White)
	3	B (Black)	B (Black)	B (Black)

Options (Factory Installed)

RC - Remote Capable (additional 3W of power)

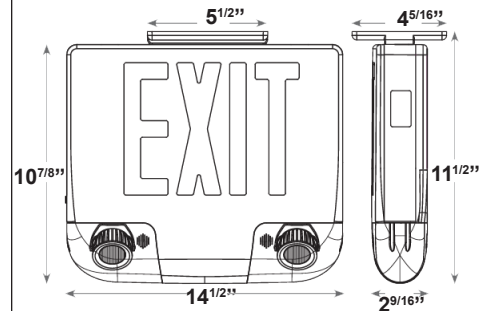

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
CAC	4.6	4.8	0.053	0.024

SPACING GUIDELINES

UNIT
LOCATION
LIGHT SOURCE

1	0.07	0.10	0.15	0.25	0.52	0.96	1.13	2.13	1.75	1.22	0.82	0.53	0.54	0.72	0.83	0.78	0.66	0.54	0.44	0.27	0.20	0.10	0.06	0.03
2	0.08	0.11	0.16	0.28	0.49	1.03	1.92	3.03	2.70	1.89	1.20	1.00	1.05	1.30	1.59	1.60	1.57	1.29	0.91	0.53	0.27	0.14	0.07	0.04
3	0.07	0.10	0.16	0.26	0.45	0.84	1.77	3.27	4.03	2.85	1.64	1.43	1.77	2.50	3.24	3.10	2.50	1.70	0.96	0.52	0.26	0.13	0.07	0.04
4	0.07	0.10	0.16	0.24	0.40	0.70	1.45	2.58	3.60	3.00	1.98	1.86	2.58	3.90	4.62	3.72	2.34	1.29	0.67	0.39	0.20	0.12	0.06	0.04
5	0.06	0.10	0.14	0.21	0.34	0.53	0.95	1.68	2.31	2.53	2.22	2.14	2.58	3.08	3.22	2.22	1.43	0.95	0.49	0.25	0.14	0.09	0.06	0.03
6	0.05	0.07	0.11	0.17	0.24	0.36	0.60	0.96	1.41	1.89	1.96	1.81	1.68	1.56	1.35	1.11	0.76	0.47	0.29	0.18	0.12	0.08	0.05	0.03

Meets NFPA 101 Requirements for: 21' center-to-center spacing - 4' path of egress 0' from wall - 71/2' mounting height