

SPECIFICATIONS

STATE SPECIFIC

HOUSING

- Durable 20-gauge steel housing
- Available in white or black finishes
- Metal lamp heads with polycarbonate lens

ELECTRICAL

- Dual 120/277V standard
- Operating Temperature: 20°C - 50°C (68°F - 122°F)

BATTERY

- 6V Maintenance-free, sealed lead acid battery
- LVD prevents battery from deep discharge
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Bi-Color LED indicator light alerts to battery condition (Green-normal, Red-check battery)
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- 5.4W remote capacity standard

ILLUMINATION

- 6V, 3.3W LED lamp heads standard (335 Lumens/head)
- Metal lamp heads with a polycarbonate lens

MOUNTING

- Universal knockout pattern on back for wall mount
- Side and top knockouts for conduit feed

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes
- Meets City of Chicago requirements

WARRANTY

- 5 Year



CLED-IEM2
Chicago Approved
Emergency Unit


ORDERING INFORMATION

CATALOG#

CLED-IEM2

OPTIONS (Factory Installed)

BLK - Black Housing

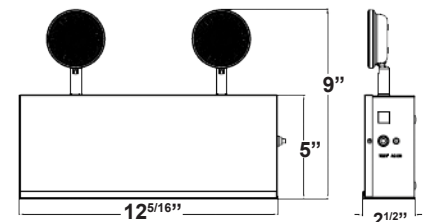

SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		6' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)	Single Unit (ft)	Unit to Unit (ft)		
CLED-IEM	7.5'	58'	62'	52'	55'	581	2
	10'	46'	50'	43'	46'		
	15'	45'	48'	38'	42'		
	20'	37'	42'	36'	40'		

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
CLED-IEM	8.4	9.4	0.08	0.04