


INSTALLATION INSTRUCTIONS FOR FIXED OPTICS EMERGENCY LIGHTING FIXTURE

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

CAUTION: The battery in this unit may not be fully charged after electricity is connected to unit. Let battery charge up for at least 24 hours. Then the normal operation of this unit should take effect. To check, press the "TEST" button after the 24 hours of charging time. The light inside the unit should turn on.

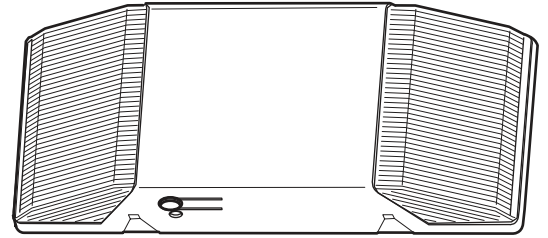

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

- Do not use outdoors.
- Equipment should be mounted in locations and at heights where it will not readily be subject to tampering by unauthorized personnel.
- Do not mount near gas or electric heaters.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than its intended use.
- Servicing of this equipment should be performed by qualified service personnel.
- Disconnect AC power before servicing.



INSTALLATION INSTRUCTIONS

1. Turn off AC power.
2. Extend un-switched AC line to unit location.
3. Remove both lenses by pulling away from housing. Do not lift unit by lenses. (Diagram A)
4. Remove unit back plate by releasing two tabs at the bottom with a narrow screwdriver blade, and pull away. (Diagram B)
5. For **WALL OR CEILING MOUNTING**, place screws through appropriate keyhole slots and tighten. Be sure to orient the back plate, so the test switch faces the bottom, or desired direction, if ceiling mounted.

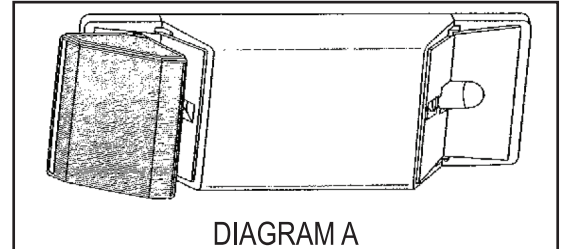


DIAGRAM A

FOR MOUNTING TO A JUNCTION BOX

Complete wiring connections as per step 6, and secure to box by removing appropriate knockouts in back plate.

FOR CONDUIT ENTRY, secure Back plate to wall or ceiling with suitable anchors. Knock out the conduit entry hole in the top of the unit housing, and install conduit with bushing.

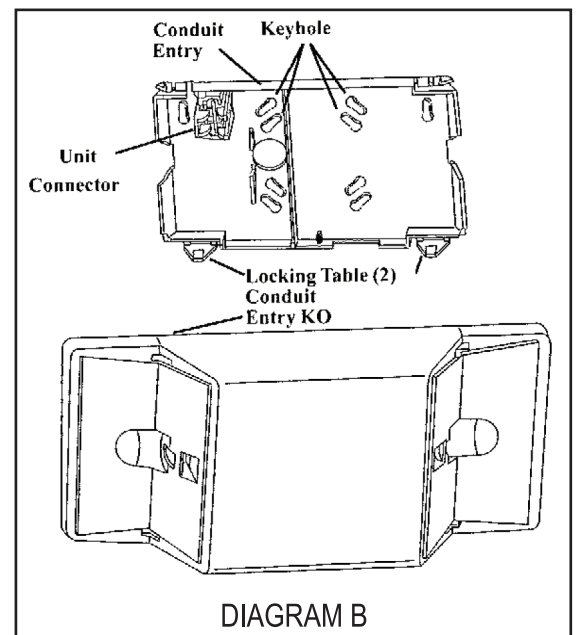


DIAGRAM B

SAVE THESE INSTRUCTIONS

6. Attach un-switched AC circuit wires to unit AC input wire with wirenuts. **INSULATE UNUSED LEAD.**
 For 120 V AC input, follow Diagram C.
 For 277 V AC input, follow Diagram D.
7. When ready to energize AC circuit, connect red battery lead to battery positive terminal. Verify battery negative terminal is connected to battery blue wire.
8. AC must be off when mating unit housing to back plate. Align AC connector over circuit board and press onto back plate until the retaining tabs snap through the housing. Reinstall both lenses by slight squeezing of the top and bottom mounting tabs.

TESTING:

To test, depress test switch. The emergency lamps will illuminate. When switch is released, lamps will go off. Allow unit to charge for 48 hours before full load testing.

IMPORTANT NOTICE:

This equipment is furnished with a low voltage disconnect circuit to prevent damage by over discharging the battery. However, if the AC supply to the unit is to be disconnected for prolonged periods of time the battery must be disconnected.

If unit fails to perform as described, disconnect AC and battery immediately, and contact either the factory or trained service personnel for assistance.

RELAMPING:

To relamp, pull lenses from housing. Relamp only with type T-5 6V 5.4W, wedge-base lamp.

WARNING:

Unused wires must be capped using enclosed wire nuts.

