



Project

Type

Catalog Number

Blank input fields for Project, Type, and Catalog Number.

SPECIFICATIONS

EMERGENCY

HOUSING

- Injection molded, high-impact resistant thermoplastic
- Offered in white or black finishes

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: 10°C - 50°C (50°F - 122°F)

BATTERY

- 4.8V maintenance-free, rechargeable NiCad battery
- Low Voltage Disconnect prevents batter from deep discharge
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

ILLUMINATION

- 1W LED Lamp heads (104 Lumens/head)
- All-inclusive lamp, reflector, and lens assembly
- Adjustable heads

MOUNTING

- Surface mount via back plate
- Suitable for wall or ceilig mount
- Knockout for conduit applications

CODE COMPLIANCE



- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes

WARRANTY

- 5 Year



DEM2-LED LED Decorative Emergency Unit

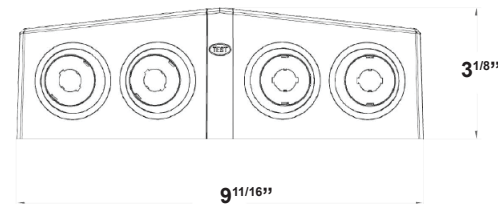

ORDERING INFORMATION

CATALOG#

DEM2-LED

OPTIONS (Factory Installed)

- BLK - Black Housing
- SD - Self Diagnostics



## SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		6' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)	Single Unit (ft)	Unit to Unit (ft)		
DEM2-LED	10'	38'	42'	36'	40'	104	4
	12'	50'	50'	40'	41'		
	15'	42'	44'	34'	37'		

## ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
DEM2-LED	2.0	2.0	0.03	0.03
DEM2-LED-SD	2.5	2.5	0.0	0.03