

**SPECIFICATIONS**

**EXITS**

**HOUSING**

- Extruded aluminum housing and end caps
- White finish standard, also available in black or brushed aluminum finishes
- Chevrons are field installable

**ELECTRICAL**

- Dual 120/277V
- Consumes 2W or less
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 10°C - 45°C (50°F - 113°F)

**ILLUMINATION**

- Ultra bright, energy efficient LEDs
- Clear acrylic edgelit panel (single face), silver and white mylar acrylic panels (single and double faces)

**BATTERY**

- Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- 120 Minute battery also available

**MOUNTING**

- Extruded aluminum canopy
- Exit can either be ceiling and wall mount, or end mount (must specify)

**CODE COMPLIANCE**

- cSAus Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- BAA Compliant

**WARRANTY**

- 5 Year

**ORDERING INFORMATION**

| MODEL#      | # Faces / Letter/ Panel                          | Housing             | Mounting                          |
|-------------|--|---------------------|-----------------------------------|
| <b>EDGP</b> | <b>1RC</b> (1 Face, Red Letters, Clear Panel)    | <b>A</b> (Aluminum) | <b>SCW</b> (Surface Ceiling/Wall) |
|             | <b>2RS</b> (2 Face, Red Letters, Mirror Panel)   | <b>W</b> (White)    | <b>SE</b> (Surface End)           |
|             | <b>2RW</b> (2 Face, Red Letters, White Panel)    | <b>B</b> (Black)    |                                   |
|             | <b>3RS</b> (1 Face, Red Letters, Mirror Panel)   |                     |                                   |
|             | <b>3RW</b> (1 Face, Red Letters, White Panel)    |                     |                                   |
|             | <b>1GC</b> (1 Face, Green Letters, Clear Panel)  |                     |                                   |
|             | <b>2GS</b> (2 Face, Green Letters, Mirror Panel) |                     |                                   |
|             | <b>2GW</b> (2 Face, Green Letters, White Panel)  |                     |                                   |
|             | <b>3GS</b> (1 Face, Green Letters, Mirror Panel) |                     |                                   |
|             | <b>3GW</b> (1 Face, Green Letters, White Panel)  |                     |                                   |

**Options (Factory Installed)**

|      |   |
|------|---|
| EM   | - NiCad Battery                                 |
| EM2  | - 120 Minute Battery                            |
| SWXE | - Special Wording Panel (prefix to part number) |


**Accessories (Order Separately, ships on side)**

SK12-\* - 12" Pendant Kit

\*Specify W-White, B-Black, BA-Brushed Aluminum



**EDGP**  
Edgelit Exit

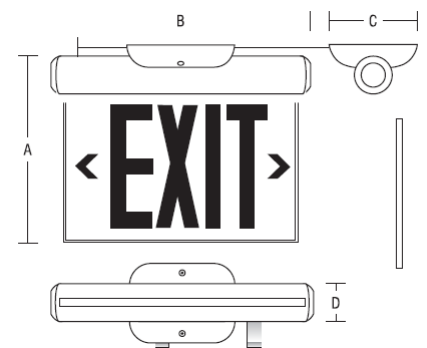

| Mount | A   | B     | C    | D  |
|-------|-----|-------|------|----|
| SCW   | 9"  | 12.5" | 4.5" | 2" |
| SE    | N/A | 14.5" | N/A  | 2" |