



Project

Type

Catalog Number

SPECIFICATIONS

EXITS

HOUSING

- Durable 20-gauge steel housing
- White finish standard, also available in brushed aluminum or black finishes
- Chevrons are field installable

ELECTRICAL

- Dual 120/277V
- 2W or less power consumption
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 10°C - 40°C (50°F - 104°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs
- Clear acrylic edgelit panel (single face), silver and white mylar acrylic panels (single and double faces)

BATTERY

- Maintenance-free, rechargeable NiCad battery (EM models)
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 48 hours

MOUNTING

- Exit can be surface wall, ceiling, or end mount (must specify)
- Recessed wall and ceiling mounting available (must specify)
- Mullion mount also available (must specify)

CODE COMPLIANCE

- cSAus Listed for Indoor Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- BAA Compliant

WARRANTY

- 5 Year

ORDERING INFORMATION

MODEL#	# Faces / Letter/ Panel	Mounting
EDGU	1RCW (1 Face, Red Letters, Clear Panel)	RC (Recessed Ceiling)
	2RSW (2 Face, Red Letters, Mirror Panel)	RW (Recessed Wall)
	2RWW (2 Face, Red Letters, White Panel)	SC (Surface Ceiling)
	3RSW (1 Face, Red Letters, Mirror Panel)	SW (Surface Wall)
	3RWW (1 Face, Red Letters, White Panel)	SE (Surface End)
		MM (Mullion Mount)*
	1GCW (1 Face, Green Letters, Clear Panel)	*1 and 3 face only
	2GSW (2 Face, Green Letters, Mirror Panel)	
	2GWW (2 Face, Green Letters, White Panel)	
	3GSW (1 Face, Green Letters, Mirror Panel)	
3GWW (1 Face, Green Letters, White Panel)		

Options (Factory Installed)

B	- Black Trim (replaces second 'W' in part number)
BA	- Brushed Aluminum Trim (replaces second 'W' in part number)
EM	- NiCad Battery
EM2	- 120 Minute NiCad Battery
SD	- Self Diagnostics (requires EM)
2C	- Dual Circuit (AC only)
FA	- Fire Alarm Interface (specify type - open/closed dry contact)
INV	- Inverted Face
SWXE	- Special Wording Panel (prefix to part number)

EX: EDGU2RSW-SC

Accessories (order separately, ships on side)

SK12-W	- 12" Pendant Kit - White
SK12-B	- 12" Pendant Kit - Black
SK12-BA	- 12" Pendant Kit - Brushed Aluminum




EDGU
Edgelit Exit


Dimensions on 2nd Page




Recessed Ceiling

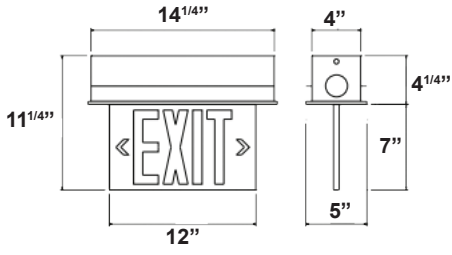


Recessed Wall

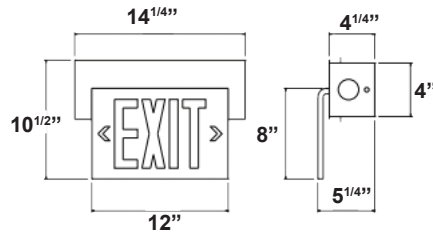


Surface Ceiling

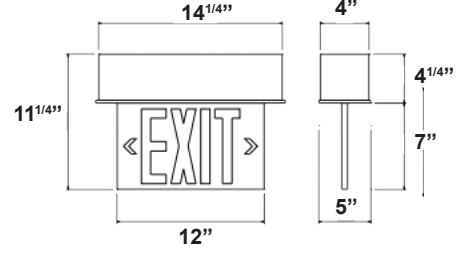



Surface Wall

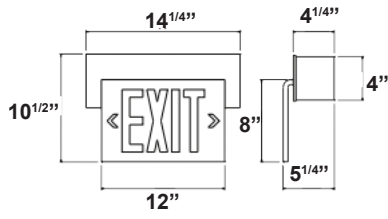

Surface End

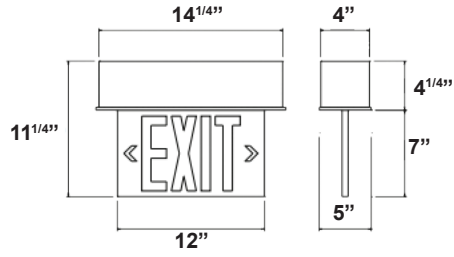

Mullion Mount

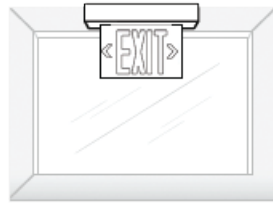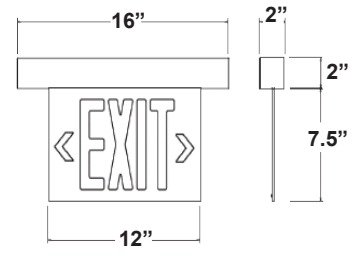

Mullion Mount



**Mullion Mount
Inverted Face**