



Project

Type

Catalog Number

SPECIFICATIONS

EMERGENCY

HOUSING

- Injection molded, high-impact resistant, thermoplastic
- Available in white or black finishes

ELECTRICAL

- Universal 120-277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

BATTERY

- 3.6V maintenance-free, lithium iron phosphate battery
- LVD prevents battery from deep discharge
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Bi-Color LED indicator light alerts to battery condition (Green-normal, Red-check battery)
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Remote Capable optional up to 2.5W

ILLUMINATION

- 1.5W LED lamp heads standard (77 Lumens/head)
- All-inclusive lamp, reflector, and lens assembly
- Adjustable heads

MOUNTING

- Universal knockout pattern on back plate for surface mount
- Suitable for wall or ceiling mount
- Knockouts for conduit feed applications

CODE COMPLIANCE

- cULus Listed for Damp Locations
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes
- CEC Title 20 Certified
- Assembled in America (Optional)

WARRANTY

- 5 Year



EM26-LED
Reduced Profile
LED Emergency Unit


ORDERING INFORMATION

CATALOG#

EM26-LED

OPTIONS (Factory Installed)

- BLK - Black Housing
- SD - Self Diagnostics
- RC - Remote Capable
- USA - Assembled in America

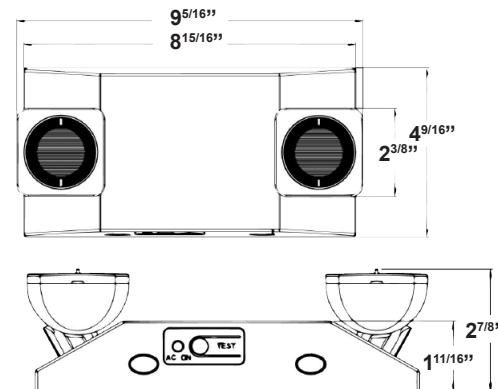

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EM26-LED	0.6	0.7	0.075	0.075
EM26-LED-SD	0.6	0.7	0.09	0.09
EM26-LED-RC	0.8	1.0	0.12	0.12
EM26-LED-RC-SD	0.8	1.0	0.12	0.12

SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)		
EM26-LED	7.5' Wall Mount	26'	30'	77	2
	10' Wall Mount	28'	29'		
	12' Wall Mount	22'	24'		
	15' Wall Mount	20'	23'		