

SPECIFICATIONS

HARSH ENVIRONMENT

HOUSING

- Copper free cast aluminum alloy housing with 1/2" NPT conduit hubs
- Housing is fully gasketed in industrial gray finish
- Removable chevrons standard

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: up to 85°C (185°F)

BATTERY

- Maintenance-free NiCad battery (EM models) provides 180 minutes of emergency power
- Fully automatic solid-state charger initiates battery charging to recharge battery in 24 hours

ILLUMINATION

- Red or Green LEDs, Acrylic panel

MOUNTING

- Standard 1/2" NPT conduit hubs provided for alternate mounting options

CODE COMPLIANCE


- Suitable for Wet Location
- IP65 Rated
- BAA Compliant
- Hazardous Rated: Class I, Div I, Groups C & D (**D1 Model**)
- Hazardous Rated: Class II, Div I, Groups E, F, & G (**D1 Model**)
- Hazardous Rated: Class I, Div II, Groups A, B, C & D (**D2 Model**)
- Hazardous Rated: Class II, Div II, Groups F, & G (**D2 Model**)
- Hazardous Rated: Class III (**D2 Model**)

WARRANTY

- 5 Year



HLEDG
Hazardous Location
Edgelit

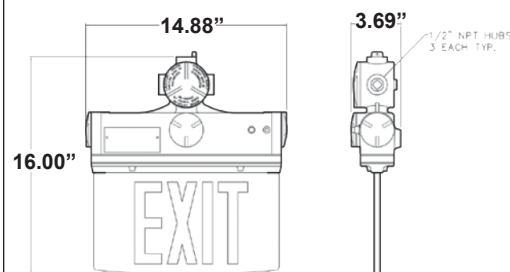

MODEL#	Rating	Face #	Letters	Housing	Mounting
HLEDG	D1	1	R (Red)	G (Gray)	WP (Wall/Pendant)
	D2	2	G (Green)		EB (End)

Options (Factory Installed)

- EM - NiCad Battery
- SD - Self Diagnostics (requires EM)