

SPECIFICATIONS

HARSH ENVIRONMENT

HOUSING

- Corrosion resistant NEMA4X fiberglass enclosure
- Gray finish standard
- Vandal resistant

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 10°C - 40°C (50°F - 104°F)

BATTERY

- Maintenance-free, rechargeable sealed lead acid battery
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 48 hours
- NiCad Battery also available

ILLUMINATION

- 9W PAR36 style weatherproof heads standard
- See lumen info on page 2

MOUNTING

- Wall surface mount

CODE COMPLIANCE

- cSA Listed for Indoor Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- BAA Compliant
- Rated for Class 1, Div 2, Groups A, B, C, D
- Class 2, Div 1 & 2, Groups E, F, G

WARRANTY

- 5 Year



**HLEM
Hazardous Location
Emergency Unit**

CATALOG#	Description
HLEM-6V36	6V, 36W, Sealed Lead Acid Battery, 9W PAR36 lamps
HLEM-6V42-NI	6V, 42W, NiCad Battery, 9W PAR36 lamps
HLEM-6V54-NI	6V, 54W, NiCad Battery, 9W PAR36 lamps
HLEM-6V60	6V, 60W, Sealed Lead Acid Battery, 9W PAR36 lamps
HLEM-6V72	6V, 72W, Sealed Lead Acid Battery, 9W PAR36 lamps
HLEM-6V90-NI	6V, 90W, NiCad Battery, 9W PAR36 lamps
HLEM-6V100	6V, 100W, Sealed Lead Acid Battery, 9W PAR36 lamps
HLEM-6V120	6V, 120W, Sealed Lead Acid Battery, 9W PAR36 lamps


HLEM-12V36	12V, 36W, Sealed Lead Acid Battery, 9W PAR36 lamps
HLEM-12V42-NI	12V, 42W, NiCad Battery, 9W PAR36 lamps
HLEM-12V60	12V, 60W, Sealed Lead Acid Battery, 9W PAR36 lamps
HLEM-12V90-NI	12V, 90W, NiCad Battery, 9W PAR36 lamps
HLEM-12V120	12V, 120W, Sealed Lead Acid Battery, 9W PAR36 lamps
HLEM-12V130-NI	12V, 130W, NiCad Battery, 9W PAR36 lamps
HLEM-12V140	12V, 140W, Sealed Lead Acid Battery, 9W PAR36 lamps

Options (Factory Installed)

SD	- Self Diagnostics
TD	- Time Delay (specify voltage)
FA	- Fire Alarm Interface
VM	- Voltmeter
AM	- Ammeter
SM	- Side Mount Heads (top mount standard)
TPS	- Tamper Proof Screws
A1H	- One Extra Lamp Head (three total)
A2H	- Two Extra Lamp Head (four total)
LH	- Less Heads
18W	- 18W Incandescent Lamps (9W standard) - 12V
LSB06	- 6W Sealed Beam LED Lamps - 12V

ACCESSORIES (order separately, ships on side)

WG6	- Wireguard
-----	-------------

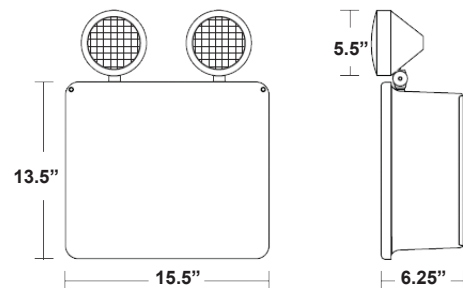

LUMEN INFORMATION

LAMP	VOLTAGE	LUMEN/LAMP
9W Incandescent	6V	47 Lms
	12V	61 Lms
9W Incandescent	12V	53 Lms
6W Sealed Beam LED	12V	465 Lms