

SPECIFICATIONS

HARSH ENVIRONMENT

HOUSING

- Durable, vandal resistant fiberglass construction
- Fully gasketed
- Industrial gray finish standard
- Field selectable directional directional indicators

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 10°C - 45°C (50°F - 113°F)
- Consumes 2W or less

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs

BATTERY

- V Maintenance-free, rechargeable NiCad battery (EM models)
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 48 hours

MOUNTING

- Wall surface mount

CODE COMPLIANCE


- cSAus Listed for Wet Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- NEMA4X Rated
- BAA Compliant
- Hazardous Location: Class I, Div II, groups A, B, C, D

WARRANTY

- 5 Year



HLEX
Hazardous Location Exit

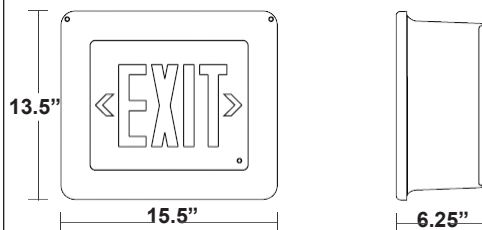

CATALOG#	Description
HLEX1RG	Red Letters, Gray Housing
HLEX1GG	Green Letters, Gray Housing

Options (Factory Installed)	
EM	- NiCad Battery
EM2	- 120 Minute NiCad Battery
SD	- Self Diagnostics
IV	- Intermittent Visual Alarm (with SD only)
2AC	- Dual Circuit (AC Only)
TPS	- Tamper Proof Screws
SWXE	- Special Wording