

SPECIFICATIONS

STATE SPECIFIC

HOUSING

- Corrosion resistant fiberglass housing
- Fully gasketed
- Gray finish, White Panel
- (4) Polycarbonate screws hold lens in place
- Chevron indicators are field selectable

ELECTRICAL

- Dual 120/277V standard
- Units consume only 2W nominal power
- Operating Temperature: 10°C - 40°C (40°F - 104°F)
- Internal Heated rated to -20°C (-4°F)

ILLUMINATION

- Red LEDs

BATTERY

- Maintenance free NiCad battery available
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination; Optional 120 minute available
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 48 hours

MOUNTING

- Universal knockout pattern on back plate for wall mounting
- Weatherproof steel canopy included for top or end mount

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- NEMA4X Listed
- Sanitation Listed
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title 20 Compliant
- BAA Listed

WARRANTY

- 5 Year

ORDERING INFORMATION

MODEL#	# Faces	Letter	Panel	Mounting
NYEX4X	1	R Red	W White	W Wall
	2			C Ceiling

OPTIONS (Factory Installed)

- EM - NiCad Battery
- EM2 - 120 Minute NiCad Battery
- SD - Self Diagnostics (requires EM)
- HTR - Internal Heater (specify voltage)
- IRT - Infrared Testing
- FAI - Fire Alarm Interface
- IA - Audible Intermittent Alarm
- IV - Visual Intermittent Alarm (requires EM-SD options)
- 2C - Dual Circuit (AC only)

ACCESSORIES (Order Separately)


SK12-* - 12" Stem Kit (other lengths available)

*Specify **W-White**; **B-Black**; **BA-Brushed Aluminum**



**NYEX4X
NYC Approved
NEMA4X Exit**

Single Face

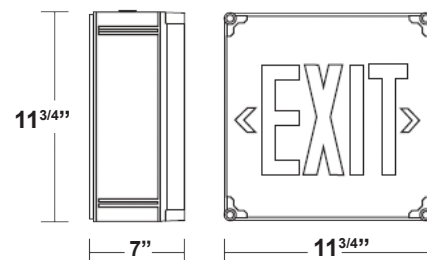

Double Face

