



Project

Type

Catalog Number

SPECIFICATIONS

EMERGENCY

HOUSING

- High-impact resistant, UV-stabilized thermoplastic
- Available in white or black finishes

ELECTRICAL

- Dual 120/277V
- QT (120-277V) available
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: 20°C - 30°C (68°F - 86°F)

ILLUMINATION

- 1.5W LED Lamp heads (72 Lumens/head)

BATTERY

- 3.6V maintenance-free, rechargeable NiCad battery
- Remote Capacity: 3.4W total
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

MOUNTING

- Surface mount via back plate (fits most standard jboxes and snaps into place)
- Suitable for wall or ceiling mount

CODE COMPLIANCE

- cULus Listed for Damp Locations
- CEC Title20 Compliant

WARRANTY

- 5 Year



**OEM-LED
LED Emergency Unit**


ORDERING INFORMATION

CATALOG#


OEM-LED

OPTIONS (Factory Installed)

BLK	- Black Housing
SD	- Self Diagnostics
RC	- Remote Capable
QT	- 120-277V (standard 120/277V)

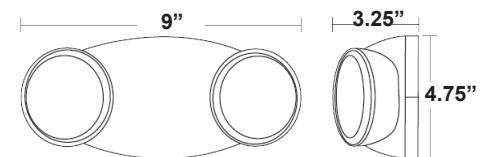

PHOTOMETRICS

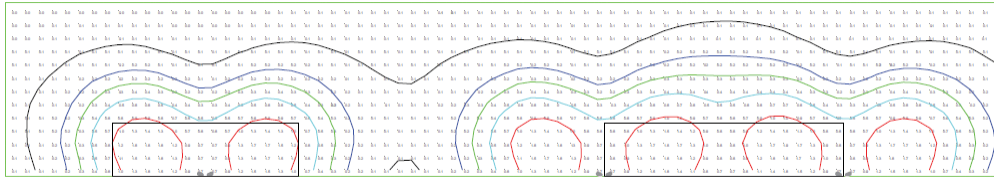

14' x 4' area
 7.5' Mounting Height
 Illuminance Values(Fc)
 Average = 1.19
 Maximum = 1.8
 Minimum = 0.6
 Avg/in Ratio = 1.98
 Max/Min Ratio = 3.00

14' Center 4' Wide
 Illuminance Values(Fc)
 Average = 1.16
 Maximum = 1.9
 Minimum = 0.6
 Avg/in Ratio = 1.93
 Max/Min Ratio = 3.17

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
OEM-LED	2.8	2.4	0.04	0.03