



Project

Type

Catalog Number

SPECIFICATIONS

EMERGENCY

HOUSING

- Injection molded, high-impact resistant, thermoplastic
- Available in white or black finishes
- Oval and rectangular trim plates included

ELECTRICAL

- Universal 120-277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: 0°C - 50°C (32°F - 122°F)

ILLUMINATION

- 4W LED Lamp heads (198 Lumens/head)
- All-inclusive lamp, reflector, and lens assembly
- Adjustable heads

BATTERY

- 4.8V maintenance-free, rechargeable Nickel metal hydride battery
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- LED indicator light alerts to battery condition (Red-normal, OFF-check battery)

MOUNTING

- Bar hangers included are compatibly with drywall or drop ceiling mount installations

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title 20

WARRANTY

- 5 Year




REM2-LED Recessed LED Emergency Unit

ORDERING INFORMATION

CATALOG# REM2-LED

OPTIONS (Factory Installed) BLK - Black Housing SD - Self Diagnostics

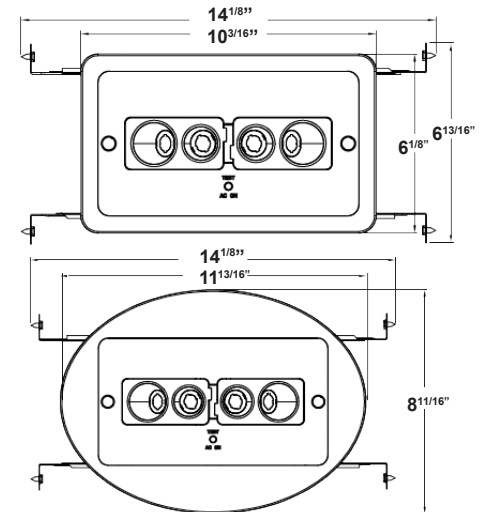

SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		6' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)	Single Unit (ft)	Unit to Unit (ft)		
REM2-LED	8' Mounting	42'	45'	42'	45'	198	2
	10' Mounting	50'	50'	40'	43'		
	12' Mounting	50'	50'	40'	43'		
	15' Mounting	40'	42'	30'	38'		

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
REM2-LED	2.0	2.0	0.03	0.03
REM2-LED-SD	2.5	2.5	0.03	0.03