



Project

Type

Catalog Number

SPECIFICATIONS

HARSH ENVIRONMENT

HOUSING

- Reinforced gasketed polycarbonate construction
- Offered in white and black finish
- Stainless steel screws

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Bi-Color LED indicator light alerts to battery condition (Green-normal; Red-check)
- 15W Models: Operating Temperature: 0°C - 50°C (32°F - 122°F)
- 36W/54W Models: Operating Temperature: 10°C - 40°C (50°F - 104°F)
- Cold Weather option: -25°C - 50°C (-13°F - 122°F)

BATTERY

- Maintenance-free, rechargeable NiCad battery (15W models)
- Maintenance-free, rechargeable sealed lead acid battery (36W/54W models)
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours (36 hours for 54W model)

ILLUMINATION

- 3.6W MR16 LED lamp heads standard (219 Lumens/head)
- Adjustable heads

MOUNTING

- Universal knockout pattern on back with gasket for watertight for wall mount seal

CODE COMPLIANCE

- UL Listed for Wet Locations
- UL Certified to NSF Standards
- NEMA4X Rated
- IP66 Rated
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes

WARRANTY

- 5 Year

ORDERING INFORMATION


CATALOG#	Description
RM-B-6V15-NI	6V, 15W - NiCad Battery
RM-B-6V36	6V, 36W - Sealed Lead Acid
RM-B-6V54	6V, 54W - Sealed Lead Acid Battery
RM-B-12V15-NI	12V, 15W - NiCad Battery
RM-B-12V36	12V, 36W - Sealed Lead Acid
RM-B-12V54	12V, 54W - Sealed Lead Acid Battery

OPTIONS (Factory Installed)

BLK	- Black Housing (white standard)
SD	- Self Diagnostics
TPS	- Tamper Proof Screws
CW	- Cold Weather (15W only -25°C)



**RM-B
NEMA4X
Emergency Unit**

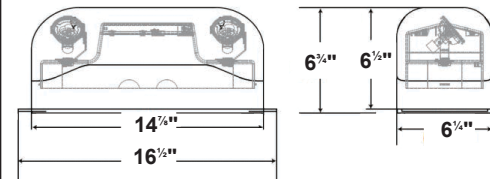

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
RM-B-6V	13.6	16.9	0.12	0.06
RM-B-12V	12.5	15.1	0.11	0.06

SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		6' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)	Single Unit (ft)	Unit to Unit (ft)		
RM-B	7.5' Mounting	38'	40'	34'	35'	219	2
	10' Mounting	36'	38'	34'	35'		
	15' Mounting	24'	6'	22'	25'		