



Project

Type

Catalog Number

**SPECIFICATIONS**

**EXITS**

**HOUSING**

- 20-Gauge steel cabinet
- White powdercoat finish
- Unit can be ordered as single (1), double (2), or single/double (3) face applications
- Field selectable knockout chevron directional indicators

**ELECTRICAL**

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: 10°C - 40°C (50°F - 104°F)

**ILLUMINATION**

- 9W PAR36 incandescent lamps standard
- MR16LED (PAR18 Heads) Lamps optional, see lumen info on page 2
- Ultra bright, energy efficient red or green LEDs

**BATTERY**

- Maintenance-free, rechargeable sealed lead acid battery
- NiCad Battery also available
- Internal transfer switch automatically connects battery to LED board and lamp heads for 90 minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

**MOUNTING**

- Universal knockout pattern and key-hole slots on back
- Conduit knockouts on sides

**CODE COMPLIANCE**

- cSAus Listed for Indoor Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- BAA Compliant

**WARRANTY**

- 5 Year

**ORDERING INFORMATION**

MODEL#	Face #	Letters	Housig	Voltage/Wattage	Battery Type
STXC	1	R (Red)	W (White)	6V18	Sealed Lead Acid
		G (Green)	B (Black)	6V22-NI	NiCad
	2	G (Green)	B (Black)	6V27	Sealed Lead Acid
				6V36	Sealed Lead Acid
	3	G (Green)	B (Black)	6V42-NI	NiCad
				12V27	Sealed Lead Acid
				12V36	Sealed Lead Acid
				12V42-NI	NiCad

EX: STXC2RW-6V22-NI

**OPTIONS (Factory Installed)**


SD	- Self Diagnostics
TD	- Time Delay (0,5,10,15: 10 minutes standard) - Specify AC Voltage
TPS	- Tamper Proof Screws
SWXE	- Special Wording Panel (prefix to part number)
LMR02	- 2W MR16LED Lamp Heads - 12V
LMR05	- 5W MR16LED Lamp Heads - 6V/12V
LMR07	- 7W MR16LED Lamp Heads - 6V/12V

**Accessories (Order Separately, Ships on Side)**

SK12-W	- 12" Pendant Kit - White
SK12-B	- 12" Pendant Kit - Black
SK12-BA	- 12" Pendant Kit - Brushed Aluminum



**STXC  
Steel Combo**

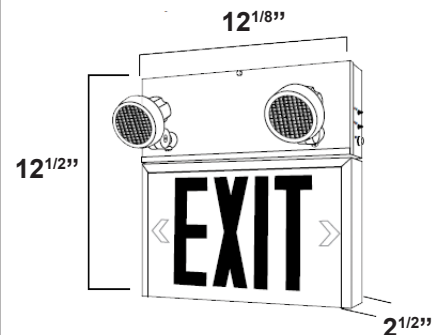

Note: Cabinet size may change according to unit capacity. Contact factory for more information



## LUMEN INFORMATION

LAMP	VOLTAGE	LUMEN/LAMP
9W Incandescent	6V	47 Lms
	12V	61 Lms
2W MR16 LED	12V	184 Lms
5W MR16 LED	6V	472 Lms
	12V	589 Lms
7W MR16 LED	6V	647 Lms
	12V	647 Lms

## SPACING GUIDELINES

Lamp	3' Wide Egress Path	
	Mounting Ht.	Unit to Unit (ft)
5W LED	7.5'	60'