

**SPECIFICATIONS**

**EXITS**

**HOUSING**

- Injection-molded high-impact resistant thermoplastic
- Available in white or black housings
- EZ snap out chevron directional indicators
- Unit comes standard single face with an extra face plate for double face applications

**ELECTRICAL**

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 40°C (32°F - 104°F)

**ILLUMINATION**

- Ultra bright, energy efficient red or green LEDs
- 1W Led Lamps (45 Lumens/head)
- 1.5W High Output lamps available (65 Lumens/head)
- Chrome-plated metallized reflector and plastic lens
- Adjustable heads
- Can remove heads to enable unit to be used as a remote capable exit

**BATTERY**

- 9.6V Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board and lamp heads for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

**MOUNTING**

- Mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

**CODE COMPLIANCE**



- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- Assembled in America (Optional)

**WARRANTY**

- 5 Year



**XC-LED  
LED Thermoplastic  
Combo**

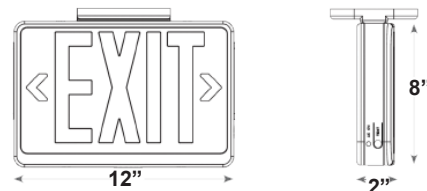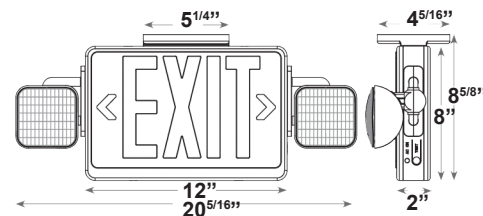

**ORDERING INFORMATION**

CATALOG#	Description
XC2RW-LED	Universal Face, Red on White
XC2RB-LED	Universal Face, Red on Black
XC2GW-LED	Universal Face, Green on White
XC2GB-LED	Universal Face, Green on Black

**Options (Factory Installed)**

RC	- Remote Capable
SD	- Self Diagnostics
LH	- Less Heads
HO	- High Output Heads (1.5W/head)
SWXE	- Special Wording Panel (prefix to part number)
USA	- Assembled in America

## ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
<b>XC2R-LED</b>	3.7	3.8	0.040	0.020
<b>XC2R-LED-RC</b>	3.4	3.6	0.033	0.015
<b>XC2G-LED</b> <b>XC2G-LED-RC</b>	3.0	3.2	0.030	0.014
<b>XC2-LED-SDT</b>	5.2	5.7	0.046	0.022