

SPECIFICATIONS

EXITS

HOUSING

- Injection-molded high-impact resistant thermoplastic
- Available in white or black housings
- EZ snap out chevron directional indicators
- Unit comes standard single face with an extra face plate for double face applications

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs
- 4.5W Led light pipe (184 Lumens/head)
- Adjustable chrome-plated reflector and acrylic lens on light pipe

BATTERY

- 4.8V Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board and light pipe for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Remote capacity standard (1W)

MOUNTING

- Mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified

WARRANTY

- 5 Year




**XCLB
LED Thermoplastic
Combo**

ORDERING INFORMATION

CATALOG#	Description
XCLB2RW	Universal Face, Red on White
XCLB2RB	Universal Face, Red on Black
XCLB2GW	Universal Face, Green on White
XCLB2GB	Universal Face, Green on Black

OPTIONS (Factory Installed)

- SD - Self Diagnostics
- SWXE - Special Wording Panel (prefix to part number)

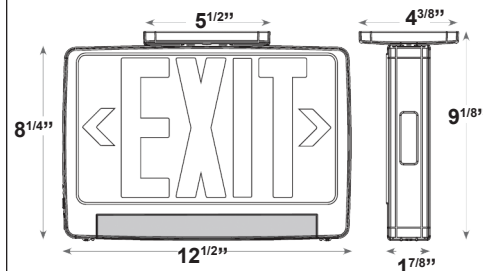

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
XCLB XCLB-RC	4.5	4.5	0.040	0.020
XCLB-SD XCLB-RC-SD	5.0	5.0	0.047	0.023

SPACING GUIDELINES



1	0.12	0.15	0.18	0.25	0.33	0.43	0.56	0.75	0.93	1.15	1.36	1.51	1.53	1.45	1.27	1.05	0.83	0.65	0.50	0.37	0.28	0.21	0.16	0.12	
2	0.13	0.15	0.19	0.26	0.32	0.43	0.56	0.72	0.91	1.09	1.28	1.40	1.44	1.36	1.21	1.01	0.82	0.64	0.50	0.38	0.29	0.21	0.16	0.12	
3	0.14	0.16	0.21	0.26	0.34	0.44	0.58	0.71	0.89	1.07	1.22	1.33	1.35	1.28	1.14	0.94	0.77	0.62	0.47	0.37	0.28	0.21	0.17	0.13	
4	0.15	0.18	0.22	0.28	0.36	0.47	0.59	0.72	0.89	1.06	1.19	1.29	1.32	1.24	1.12	0.95	0.80	0.65	0.50	0.38	0.29	0.23	0.18	0.13	
5	0.13	0.16	0.22	0.27	0.34	0.42	0.53	0.64	0.77	0.89	1.02	1.17	1.12	1.09	1.00	0.86	0.73	0.61	0.48	0.39	0.30	0.24	0.19	0.15	
6	0.08	0.11	0.14	0.18	0.23	0.28	0.35	0.42	0.52	0.63	0.70	0.77	0.80	0.74	0.77	0.64	0.56	0.50	0.40	0.32	0.26	0.21	0.17	0.13	
	12	11	10	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	10	11	12

Meets NFPA 101 Requirements for: 12' center-to-center spacing - 3' path of egress 1' from wall - 7^{1/2'} mounting height