



Project

Type

Catalog Number

**SPECIFICATIONS**

**HARSH ENVIRONMENT**

**HOUSING**

- Reinforced polycarbonate onstruction
- Available in white or black finishes
- Field selectable knockout chevron directional indicators

**ELECTRICAL**

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: -20°C - 50°C (4°F - 122°F)

**ILLUMINATION**

- Ultra bright, energy efficient red or green LEDs

**BATTERY**

- 4.8V Maintenance-free, rechargeable NiCad battery (EM models)
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery)

**MOUNTING**

- Polycarbonate mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

**CODE COMPLIANCE**

- UL Listed for Wet Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- NEMA4X Rated
- IP66 Rated
- NSF Rated

**WARRANTY**

- 5 Year





**XEHA  
NEMA4X Polycarbonate  
Exit Sign**

**ORDERING INFORMATION**

MODEL#	Face #	Letter	Housing
XEHA	1	R (Red)	W (White)
	2	G (Green)	B (Black)

**OPTIONS (Factory Installed)**

EM	- NiCad Battery
SD	- Self Diagnostics (requires EM)
TPS	- Tamper Proof Screws
2AC120	- Dual Circuit with 120V input (AC only)
2AC277	- Dual Circuit with 277V input (AC only)
TPS	- Tamper Proof Screws

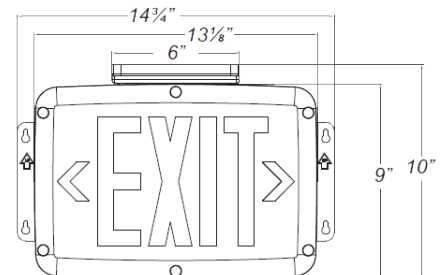

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
XEHA	2.5	2.5	0.25	0.010