

## SPECIFICATIONS

OUTDOOR

### HOUSING

- Heavy duty die cast aluminum housing
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- 1/2" coin plugs with O-rings for conduit and photocell

### ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Operating Temperature: -30°C (-22°F) - 40°C (104°F)

### OPTICAL SYSTEM

- Prismatic borosilicate glass lens with gasket
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI > 80
- 4000K and 5000K available

### ILLUMINATION

- 120W LED

### MOUNTING

- Optional cast aluminum mounting plate mounts directly over a 4" recessed outlet box, or use 1/2" surface conduit

### CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP65 Rated
- RoHS Compliant

### WARRANTY

- 5 Year
- 10 Year Available



**VLWP4-B**  
Large Shallow  
LED Wall Pack

## ORDERING INFORMATION


CATALOG #	LUMENS	COLOR
VLWP4-B-120L-QT-40K	12,146	4000K
VLWP4-B-120L-QT-50K	11,782	5000K

### OPTIONS (Factory Installed)


PC	-	120-277V Button Photocell
PCP	-	120-277V Pencil Photocell
10YR	-	Ten Year Warranty

### ACCESSORIES (Ships on Side)

VLWP4-B-GS	-	Glare Shield
------------	---	--------------

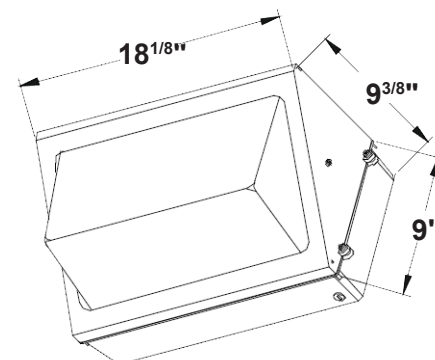

## PHOTOMETRICS

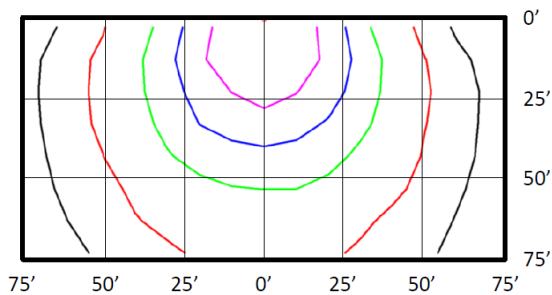

- 5.0
- 2.0
- 1.0
- 0.5
- 0.2
- 0.1

**VLWP4-B-120L-QT-50K**  
**Mounting Height = 25ft**

### BUG Rating: B1-U4-G5

Zone	Lumens	
FL - Front - Low (0-30)	1,175	10%
FM - Front - Medium (30-60)	3,212	26%
FH - Front - High (60-80)	2,586	21%
FVH - Front - Very High (80-90)	1,159	10%
<b>Total Forward Light</b>	<b>8,132</b>	<b>67%</b>
BL - Back - Low (0-30)	631	5%
BM - Back - Medium (30-60)	602	5%
BH - Back - High (60-80)	160	1%
BVH - Back - Very High (80-90)	31	0%
<b>Total Back Light</b>	<b>1,425</b>	<b>12%</b>
UL - Up Light - Low (90-100)	997	8%
UH - Up Light - High (100-180)	1,592	13%
<b>Total Up Light</b>	<b>2,589</b>	<b>21%</b>
<b>Total Lumens</b>	<b>12,146</b>	<b>100%</b>

**VLWP23B-80L-QT-50K**  
**Mounting Height = 15ft**